

CSC4200/5200 – COMPUTER NETWORKING

Instructor: Susmit Shannigrahi


SPANNING TREE

sshannigrahi@tntech.edu



Exam

- Sept 28th
 - **If you have a conflict, let me know NOW!**
 - Location – iLearn
- Open book – but you may not have time to look things up.
- Only from the book and lecture notes, no programming questions

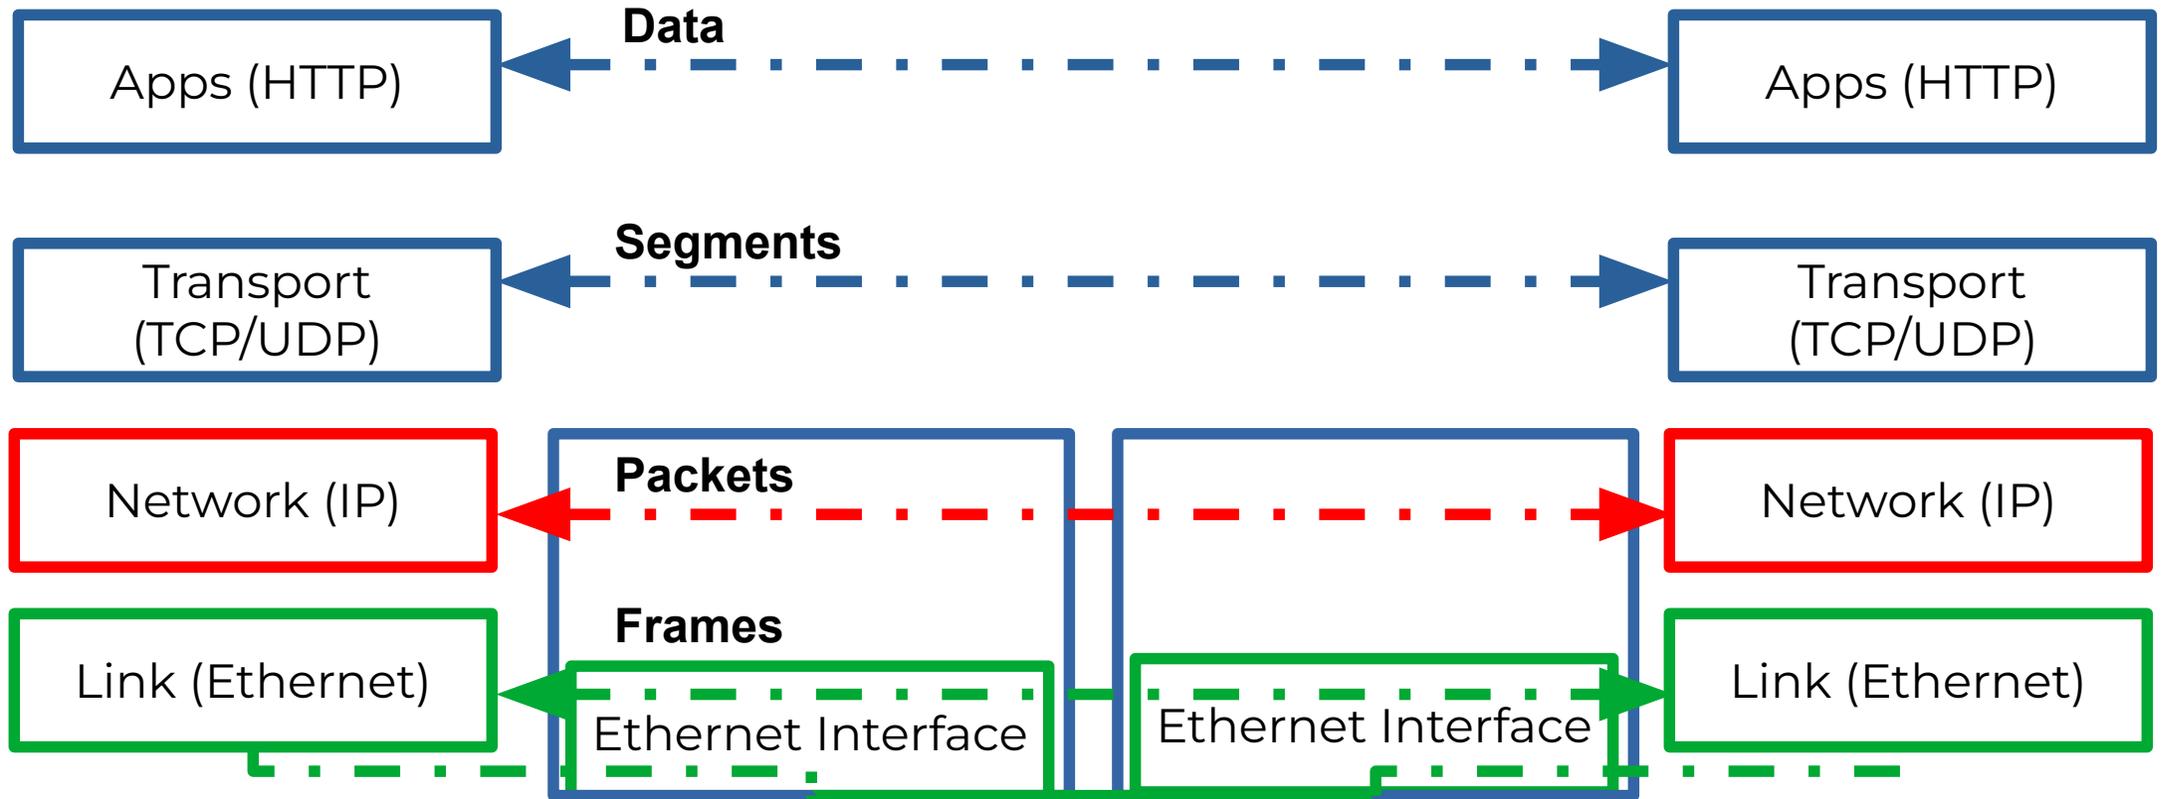

Bits (1010001)

So far...

- we saw how to build a local network
- How do we interconnect different types of networks to build a large global network?

Switching

- Switch


- A mechanism to interconnect
- links to form a large network

- Forward **frames**

- Separate the collision domains

- Filter packets between LANs


- Connects two or more LAN segments - **Bridging**

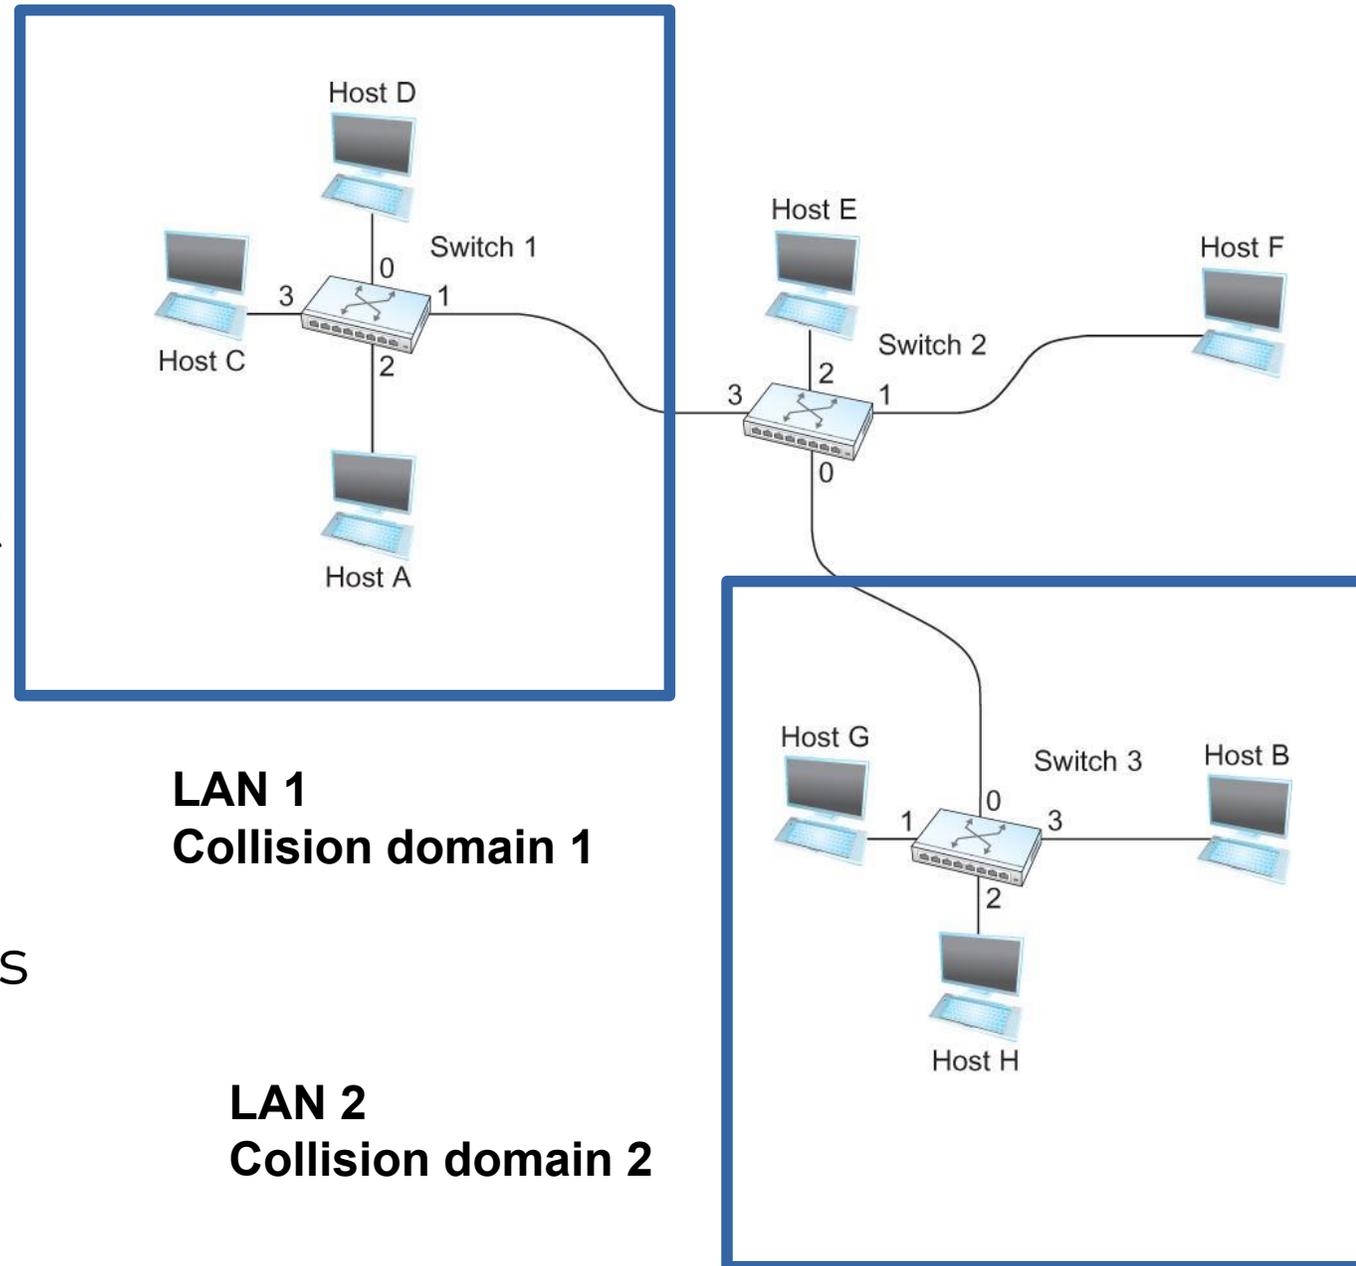


Switches are self learning!

- Inspect the source MAC address
 - **What is a mac address?**
- Associate mac address and incoming interface
- Store this association for later use, (for some time)
 - aging-timer

Switching Table

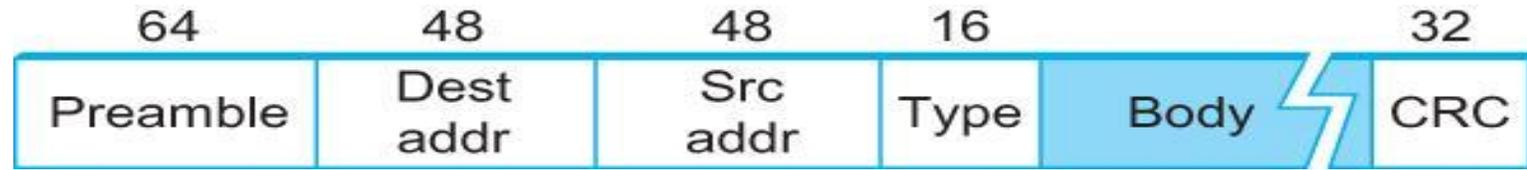

- To decide how to forward a packet, a switch consults a *forwarding table*

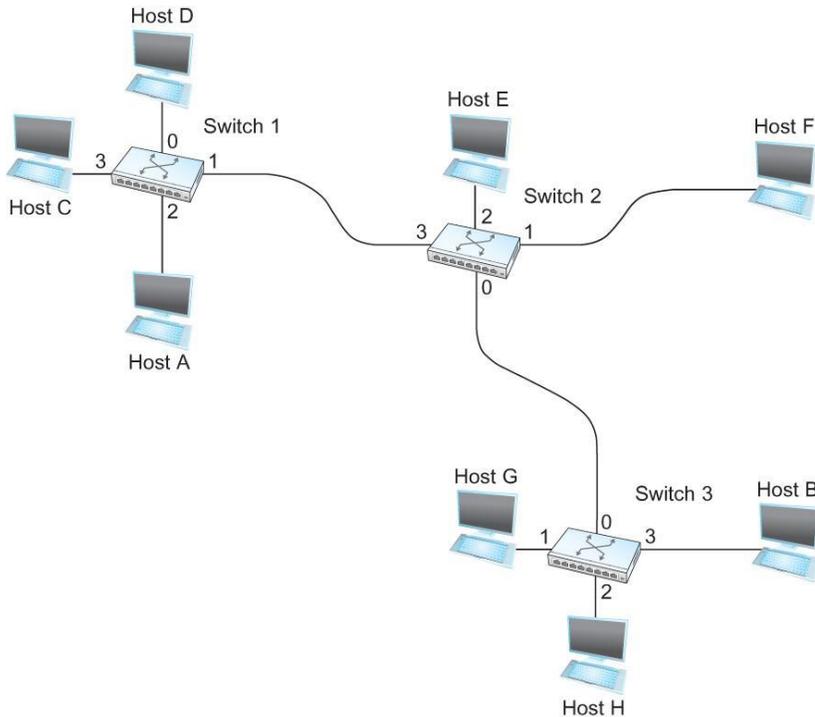

Destination, Port	


A	3
B	0
C	3
D	3
E	2
F	1
G	0
H	0

Forwarding Table for Switch 2

Switching Table

- Unknown destination → send out on all Interfaces (**flooding**)

• Skip the incoming interface

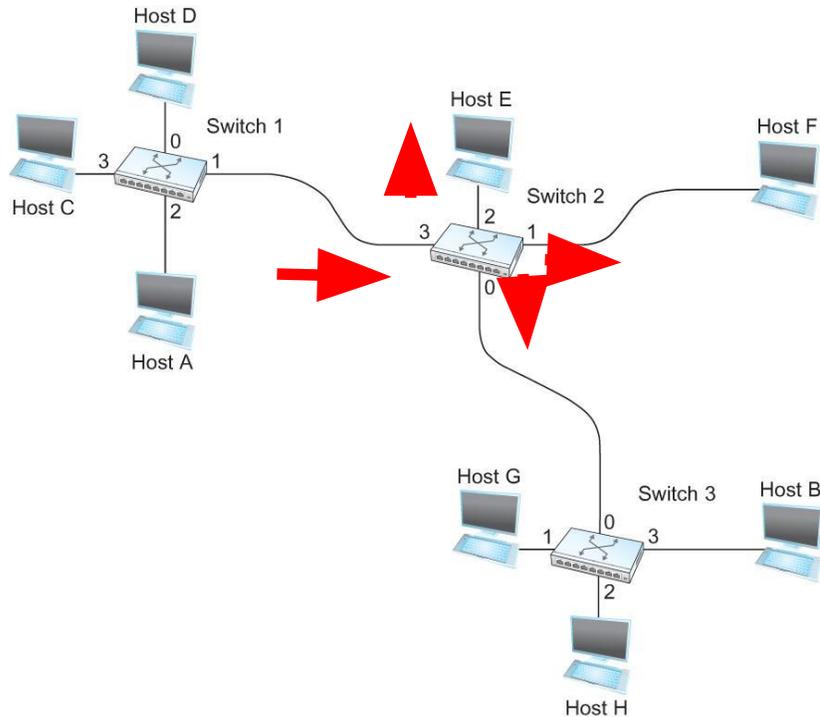


Destination, Port	

A	3
B	0
C	3
D	3
E	2
F	1
G	0
H	0

Forwarding Table for Switch 2

Loop

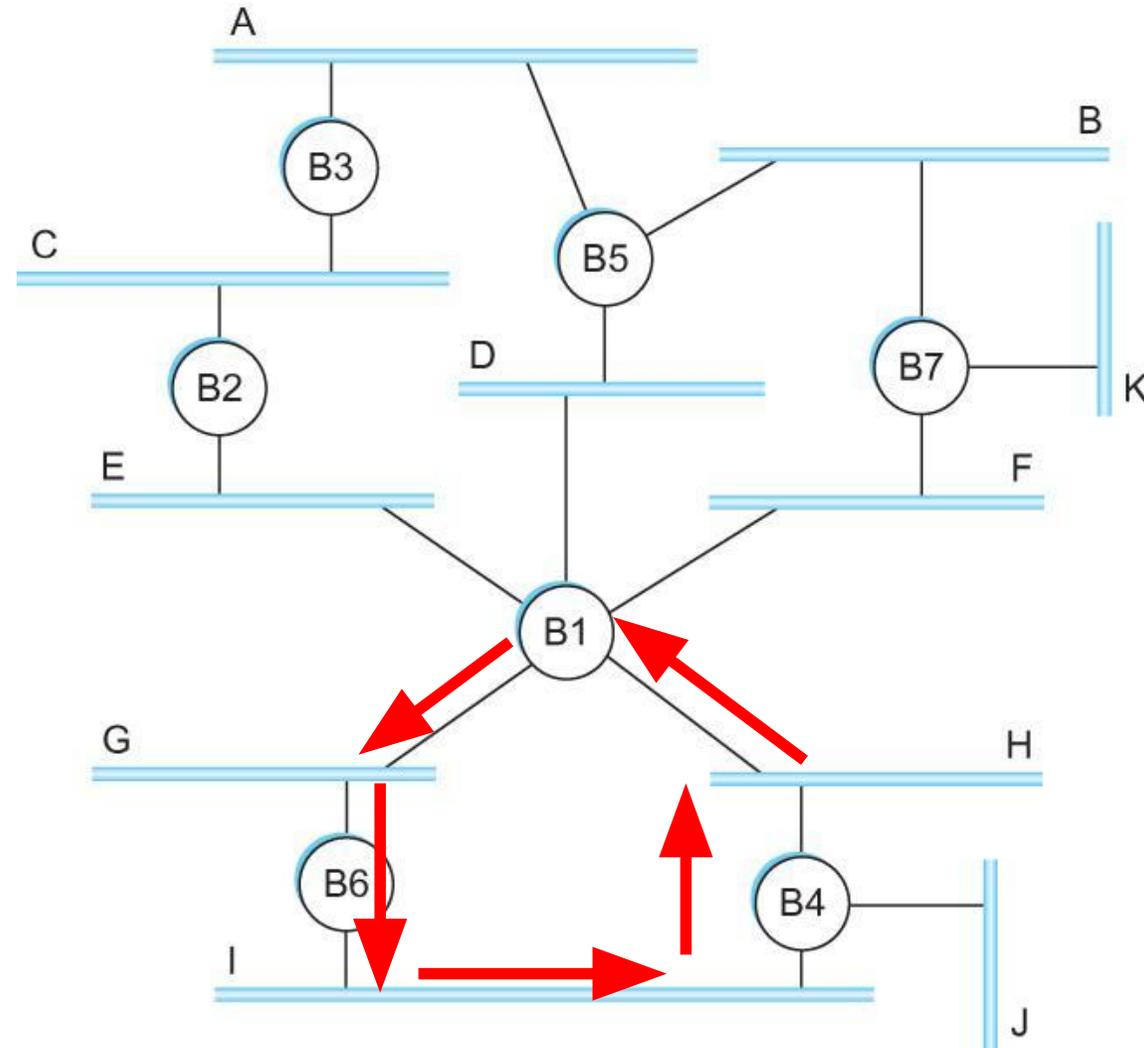


**Spot the loop
Why?**

Solution? Spanning Tree

Think of the extended LAN as being represented by a graph that possibly has loops (cycles)

- A spanning tree is a sub-graph of this graph that covers all the vertices but contains no cycles
- Spanning tree keeps all the vertices of the original graph but throws out some of the edges

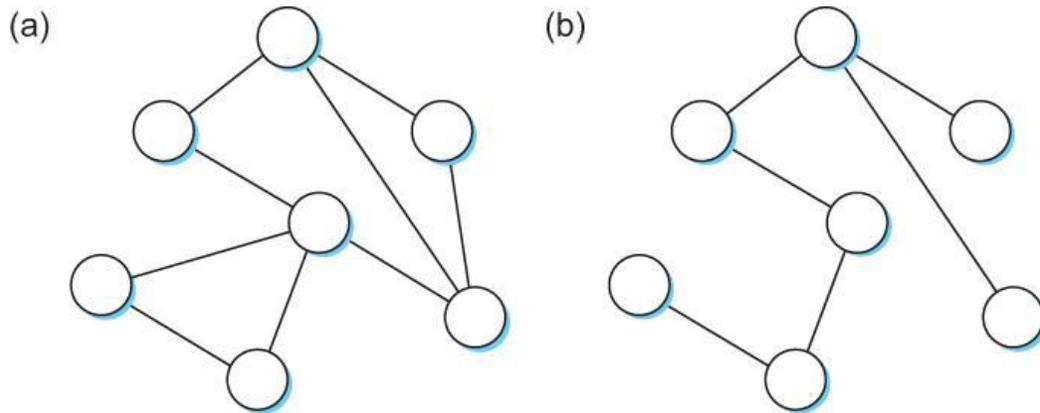


Example of (a) a cyclic graph; (b) a corresponding spanning tree.

How do we create a spanning tree?

- Properties: No loops
- How?
 - Selectively flood
 - Distributed algorithm, no coordination!
 - Automatic reconciliation when failure occurs


How do we create a spanning tree?

- Properties: No loops
- How?
 - Selectively flood
 - Distributed algorithm, no coordination!
 - Automatic reconciliation when failure occurs
- Switches elect a root
 - The switch with the smallest identifier
 - Each switch identifies if its interface is on the shortest path from the root
 - Exclude if not
- Send message (Y,d,X)
- From x , claims Y is the root, distance is d

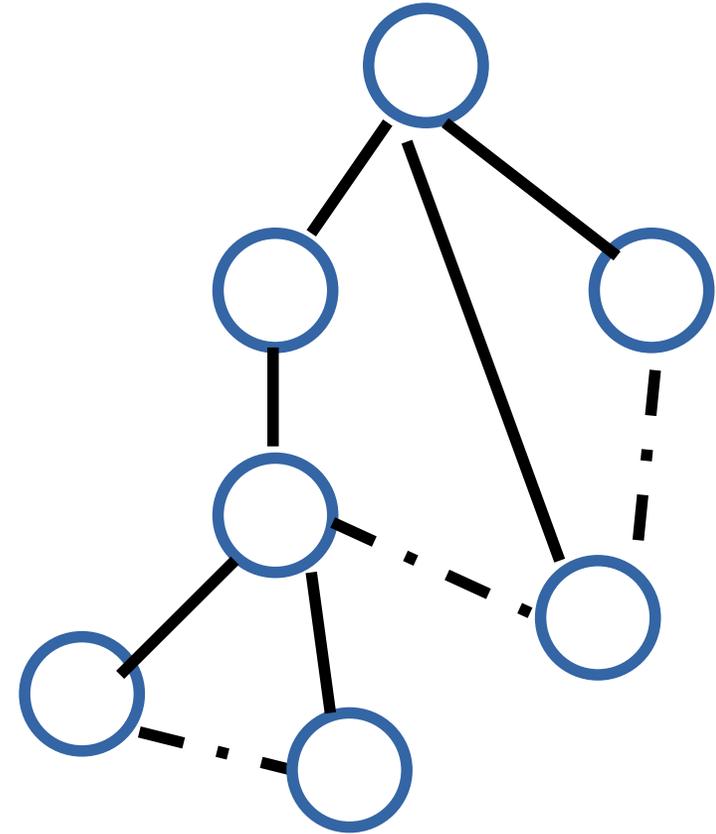


How do we create a spanning tree?

- **Message (Y, d, X) - (to, distance, from)**
- 4 thinks it's the root
- Sends (4, 0, 4) to 3 and 5
- Receives (3,0,3) from 3
 - Sets it to as the root since $3 < 4$
- Receives (3,1,5) from 5
 - Sees that this is a longer path to 3
 - 2 hops vs direct path (1 hop)
 - Removes 4-5 link from the tree

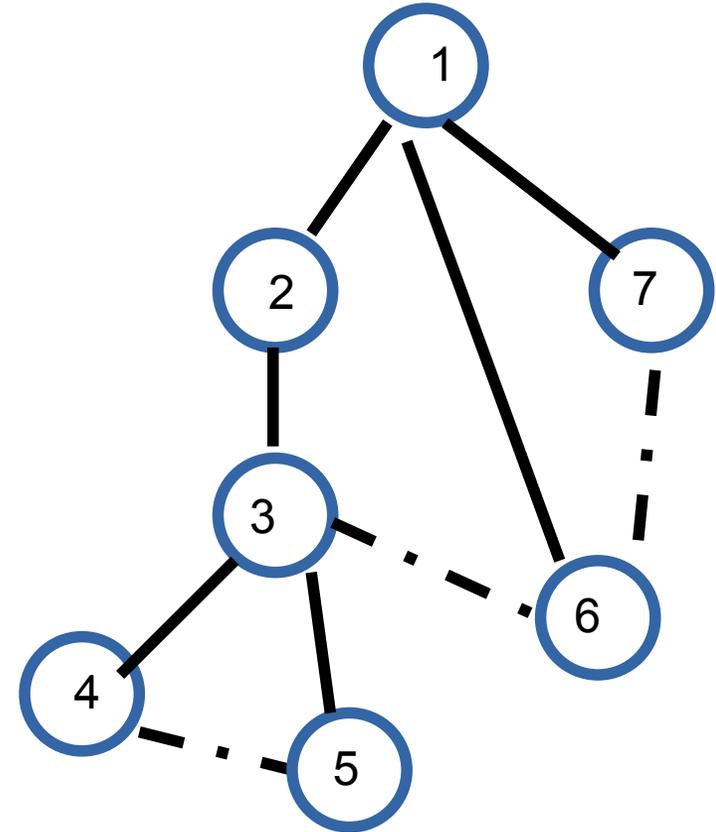


What does 4 do when it hears from 2?

- **Message (Y, d, X) - (to, distance, from)**
- 2 hears (1, 0, 1) from 1
- 2 sends (1, 1, 2) to 3
- 3 sends (1, 2, 3) to 5 and 4
- 4 receives (1, 2, 3) from 3
- 4 receives (1, 3, 5) from 5
- Sets 1 as root (id=1 is < id=4)
- Prunes the 4-5 path since it is 4 hops compared to 3 hops via 3

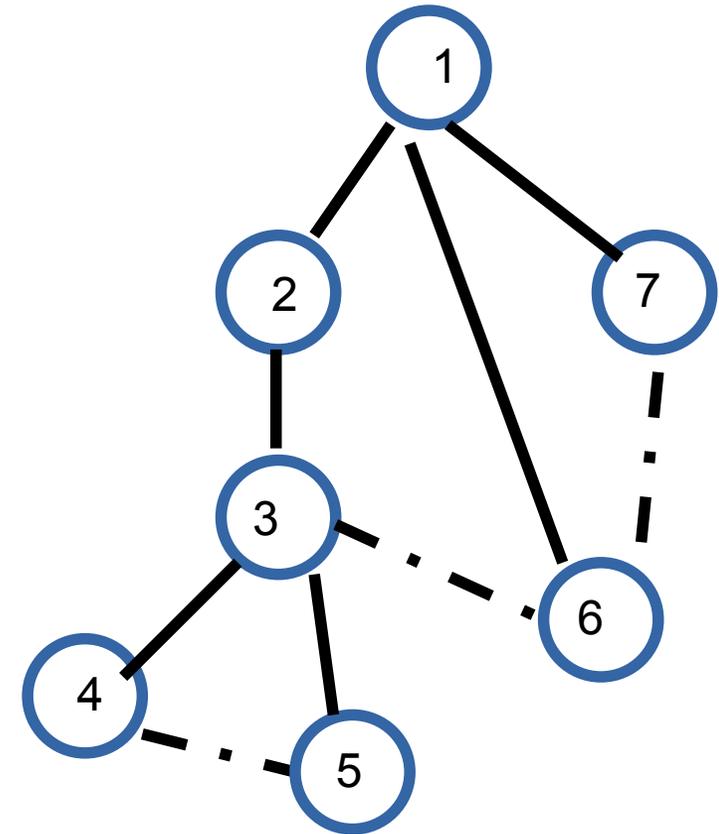

Failure and Downsides

- Even after the system has stabilized, the root continues to send messages periodically
 - Other bridges continue to forward these messages
- When a bridge fails, the downstream bridges will not receive the configuration messages
 - After waiting a specified period of time, they will
 - once again claim to be the root and the
 - algorithm starts again
- No load balancing

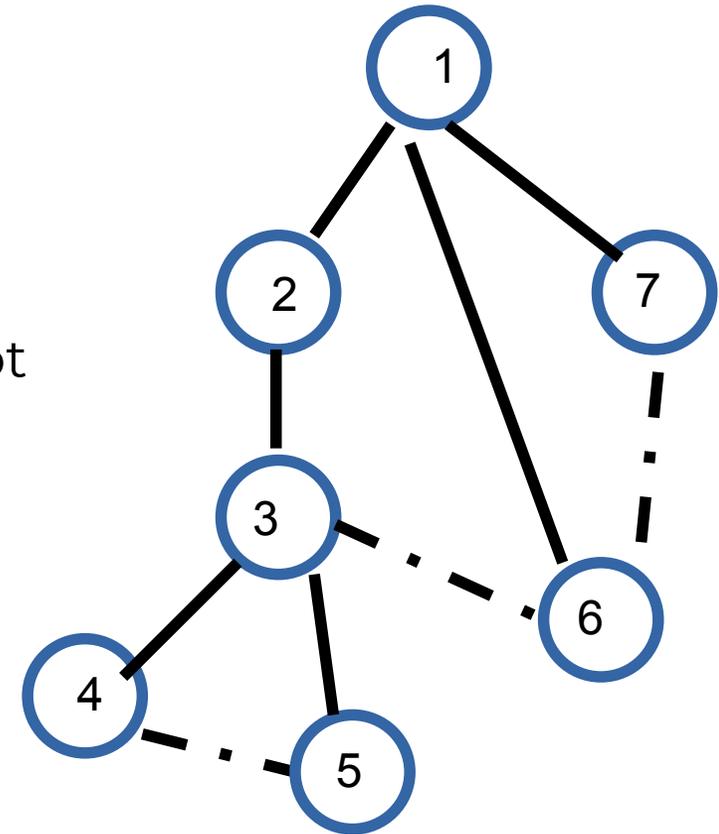

Virtual LAN (VLANs)


- LANs are on the same Ethernet segments
- Does not scale very well – too many wires
- How can we put multiple people in different locations on the same Ethernet segment (LAN)?
- How do we create multiple LANs over the same wire?

Why separate at all?

- LANs are on the same Ethernet segments! Security.
- Isolation – sensitive traffic vs normal traffic
- Containment of traffic – your for loop broke the internet
- How do we create multiple LANs over the same wire?




VLANs

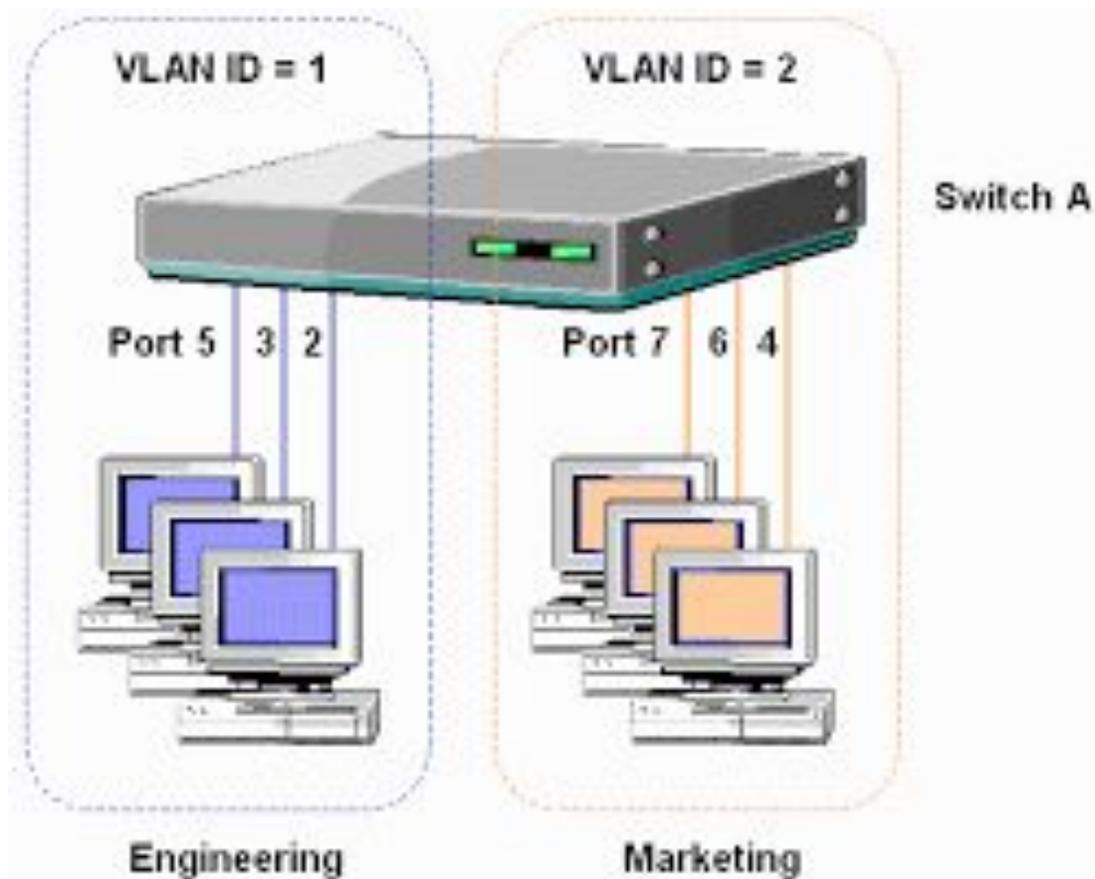

- Switches specify which VLAN is accessible over which interface
- Each interface can have a VLAN color
- Each Mac address can have a interface color
- Add VLAN tag to the Ethernet header



Link Layer Recap – All this for a cat picture

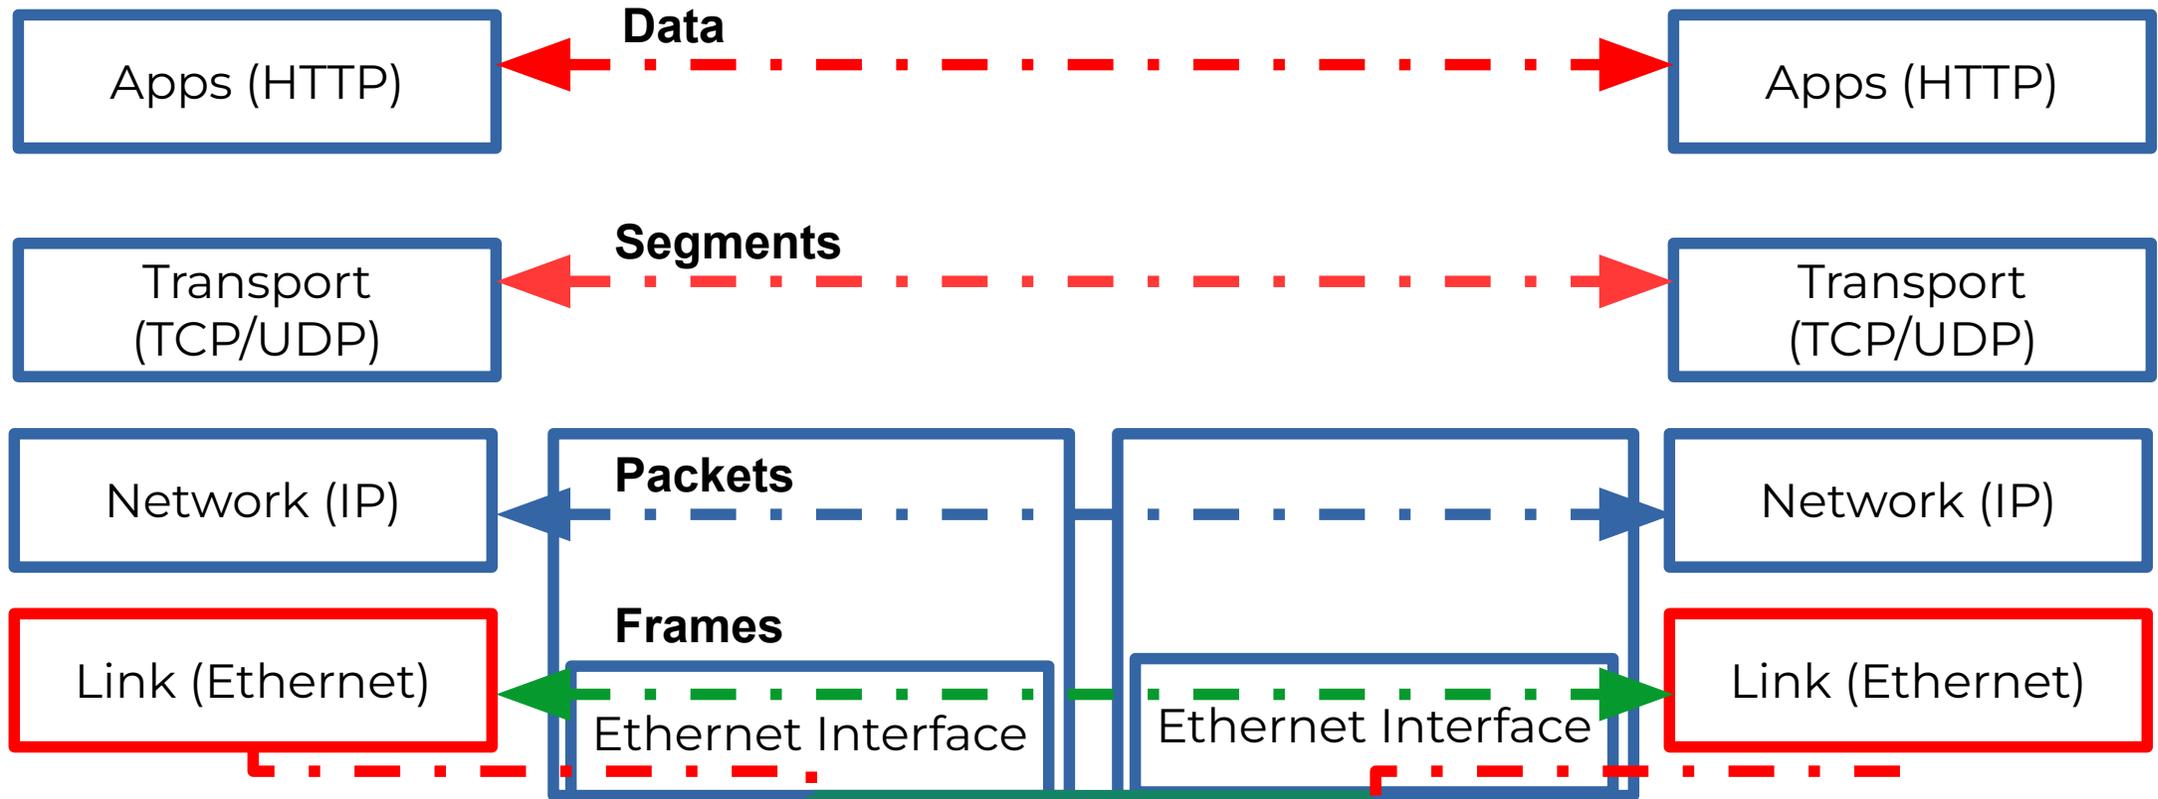

Bits (1010001)